
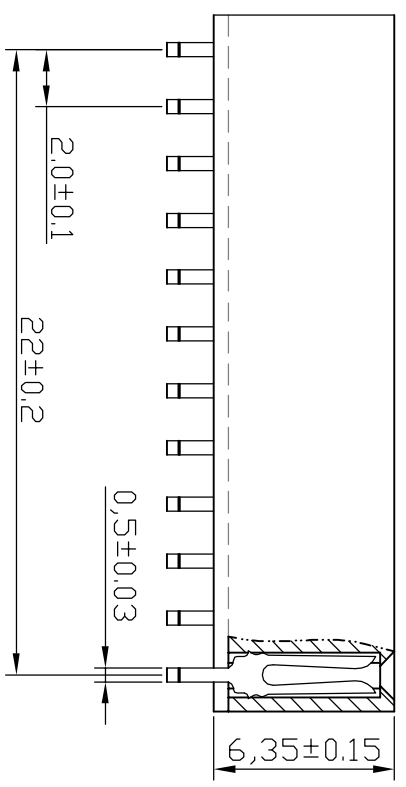




图号 F2000095

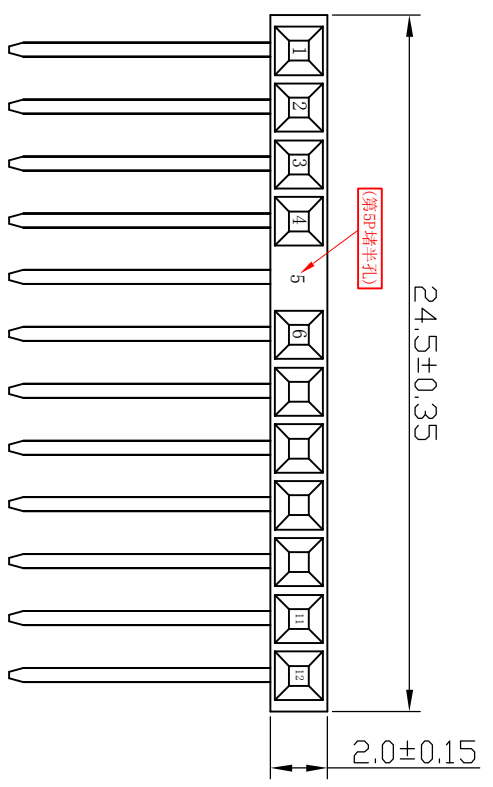

A	2.0 x No. of Contacts-2.0
B	2.0 x No. of Positions

SPECIFICATIONS

Current Rating: 1.5 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000M ohm Min
 Contact Resistance: 20m ohm Max
 Operation Temperature: -40°C to +105°C
 Insulator Material: Polyester (UL94V-0)
 Standard: 6T
 Contact Material: Brass
 Contact Plating: Goldflash over 40u" Ni
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5-10 seconds)

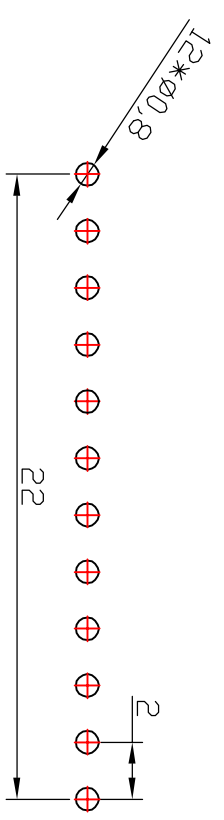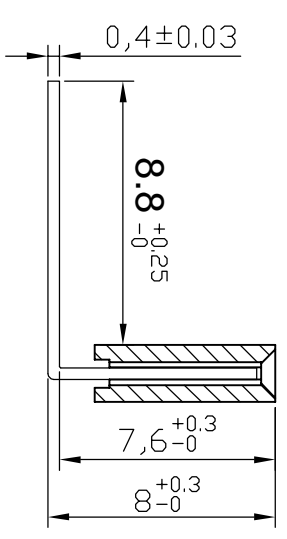

Type	F=Female Header
Pitch	2.54=254 2.00=200 1.27=127 1.00=100 0.80=80 1.27X.54=125
No. of Rows	2X01-40Pin 1X01-40Pin 2X01-50Pin 1X01-50Pin 3X01-40Pin
Connector Type	S=Straight R=Right Angle M=SMT
Insulator Material Option	A=BK-PBT B=BK-PA6T C=BK-PA9T D=LCP S=Special
Diameter of packing	Bag=A Box=B Tube=C Tape=D
Contact Plating	SN: Tin G0: Gold Flash G2: 10u" Gold G3: 30u" Gold G4: 50u" Gold G5: 100u" Gold G6: 150u" Gold Standard: G0

F200 - 1X12-R B C GO - 001

除非有说明, 否则公差按下表:

尺寸标注	公差
X	长度 ±0.25
.X	角度 ±1.5°
.XX	±0.15
.XXX	±0.10

产品型号	P20.0 1x12Pin HK.35 V型 90度加高型 (总高8.0mm, 3角0) PCB: 8.HD, 25角0 (第5号焊点)		
产品编号			
文件位置			
版本	A/0	比例	1:1
审核	蔡逸伟	单位	MM
批准	何玲	图幅	A4

