
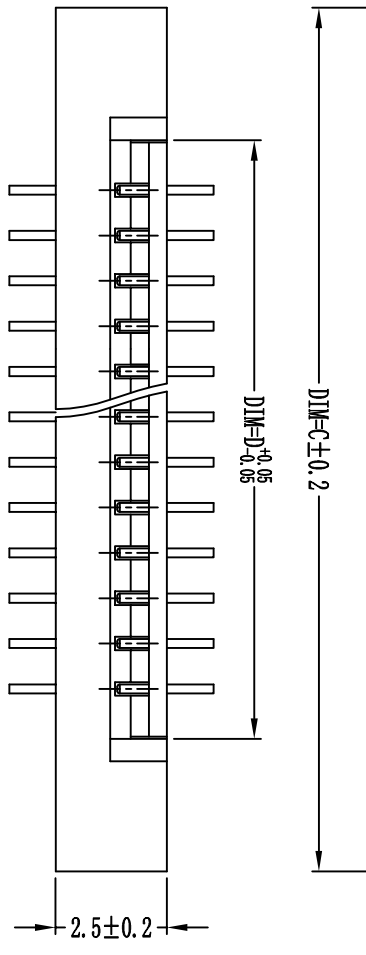


Electrical Characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: ≤ 30mΩ
 Insulation resistance: ≥ 500mΩ
 Relative Humidity: 93%~+40°C

Material Description:
 Contact: Phosphor Bronze Tin-Leadplated
 Housing: HEIGHT TEMP. PLASTIC(U194V-0)
 Slider: HEIGHT TEMP. PLASTIC(U194V-0)

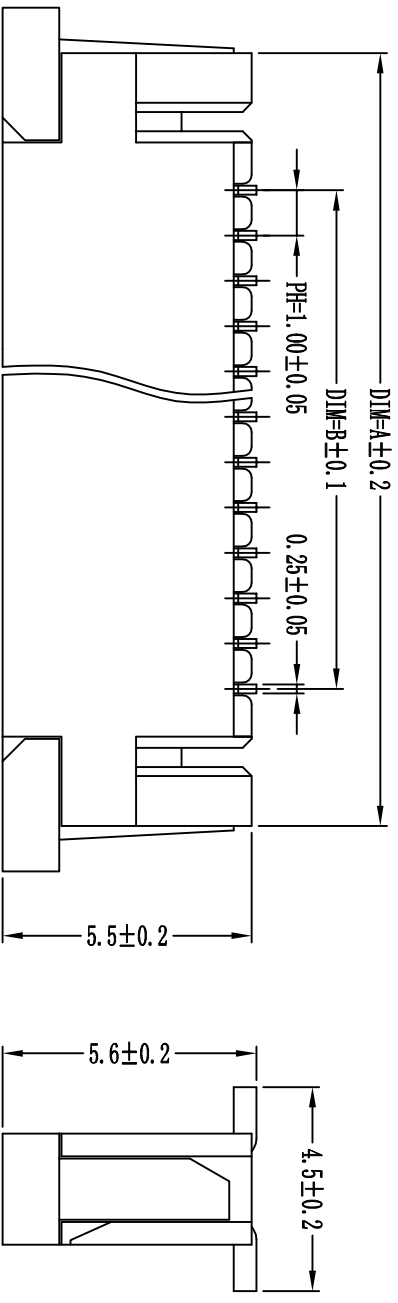

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.0	29.00	37.0	31.10
29P	34.0	28.00	36.0	30.10
28P	33.0	27.00	35.0	29.10
27P	32.0	26.00	34.0	28.10
26P	31.0	25.00	33.0	27.10
25P	30.0	24.00	32.0	26.10
24P	29.0	23.00	31.0	25.10
23P	28.0	22.00	30.0	24.10
22P	27.0	21.00	29.0	23.10
21P	26.0	20.00	28.0	22.10
20P	25.0	19.00	27.0	21.10
19P	24.0	18.00	26.0	20.10
18P	23.0	17.00	25.0	19.10
17P	22.0	16.00	24.0	18.10
16P	21.0	15.00	23.0	17.10
15P	20.0	14.00	22.0	16.10
14P	19.0	13.00	21.0	15.10
13P	18.0	12.00	20.0	14.10
12P	17.0	11.00	19.0	13.10
11P	16.0	10.00	18.0	12.10
10P	15.0	9.00	17.0	11.10
9P	14.0	8.00	16.0	10.10
8P	13.0	7.00	15.0	9.10
7P	12.0	6.00	14.0	8.10
6P	11.0	5.00	13.0	7.10

NOTES:
 1. PLASTIC BURRS 0.1mm MAX

SER	AREA	REVISIONS	CHK	DATE	UNIT	ANG.	SCALE	SIZE	NAME	REV
△					MM		8:1	A3	PC. 1.0K CONNECTOR	A

UNLESS OTHERWISE SPECIFIED	TOLERANCES ARE
X.X	±0.20
X.XX	±0.10
X.XXX	±0.05
ANG.	±0.30°

APPROVED	DATE	PART NO
		AF2GXXR*80T110

CHECKED	DATE	DRAWING NO
		JB96*03005

DRAWN	DATE	COMPUTER NO
	2004/06/01	KDD0300506