



Figure similar

Circuit breaker size S0 for motor protection CLASS 10 A-release 7...10 A  
Short-circuit release 130 A Screw terminal Standard switching capacity !!!  
Phased-out product !!! Successor is SIRIUS 3RV2 Preferred successor  
type is >>3RV2011-1JA10<<

<b>product brand name</b>	SIRIUS
<b>product designation</b>	circuit breaker
<b>design of the product</b>	for motor protection
<b>General technical data</b>	
product extension auxiliary switch	Yes
<b>power loss [W] for rated value of the current</b>	
• at AC in hot operating state	9.25 W
• at AC in hot operating state per pole	3.1 W
<b>surge voltage resistance rated value</b>	6 000 V
protection class IP on the front	IP20
<b>shock resistance</b>	25g / 11 ms
mechanical service life (switching cycles) of the main contacts typical	100 000
<b>continuous current rated value</b>	10 A
<b>Substance Prohibitance (Date)</b>	05/01/2012
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-20 ... +60 °C
• during storage	-50 ... +80 °C
• during transport	-50 ... +80 °C
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>adjustable current response value current of the current-dependent overload release</b>	7 ... 10 A
<b>operating voltage</b>	
• rated value	690 V
• at AC-3 rated value maximum	690 V
operational current at AC-3 at 400 V rated value	10 A
operating power at AC-3	
• at 400 V rated value	4 kW
operating frequency at AC-3 maximum	15 1/h
<b>Auxiliary circuit</b>	
number of CO contacts for auxiliary contacts	0
<b>Protective and monitoring functions</b>	
<b>product function</b>	
• ground fault detection	No
• phase failure detection	Yes
<b>trip class</b>	CLASS 10
<b>breaking capacity maximum short-circuit current (Icu)</b>	

- at AC at 240 V rated value
- at AC at 400 V rated value
- at AC at 500 V rated value
- at AC at 690 V rated value

100 kA  
100 kA  
42 kA  
6 kA

### Short-circuit protection

**design of the overcurrent release and short-circuit release**

thermomagnetic

### Installation/ mounting/ dimensions

**mounting position**

any

**fastening method**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

**height**

97 mm

**width**

45 mm

**depth**

96 mm

required spacing with side-by-side mounting

- backwards
- at the side

0 mm  
0 mm

### Connections/ Terminals

**product component removable terminal for auxiliary and control circuit**

No

**type of electrical connection**

- for main current circuit
- for auxiliary and control circuit

screw-type terminals  
screw-type terminals  
front side

**arrangement of electrical connectors for main current circuit**

**type of connectable conductor cross-sections**

- for main contacts
  - solid
  - stranded
  - finely stranded with core end processing
- at AWG cables for main contacts

2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>)  
2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>)  
2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>)  
2x (14 ... 10)

### Safety related data

**touch protection against electrical shock**

finger-safe

### Certificates/ approvals

General Product Approval

For use in hazardous locations



[Confirmation](#)



For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other

Railway



[Confirmation](#)

[Miscellaneous](#)



[Special Test Certificate](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1021-1JA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1021-1JA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1021-1JA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1021-1JA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1021-1JA10&lang=en)


Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1021-1JA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV1021-1JA10&objecttype=14&gridview=view1>

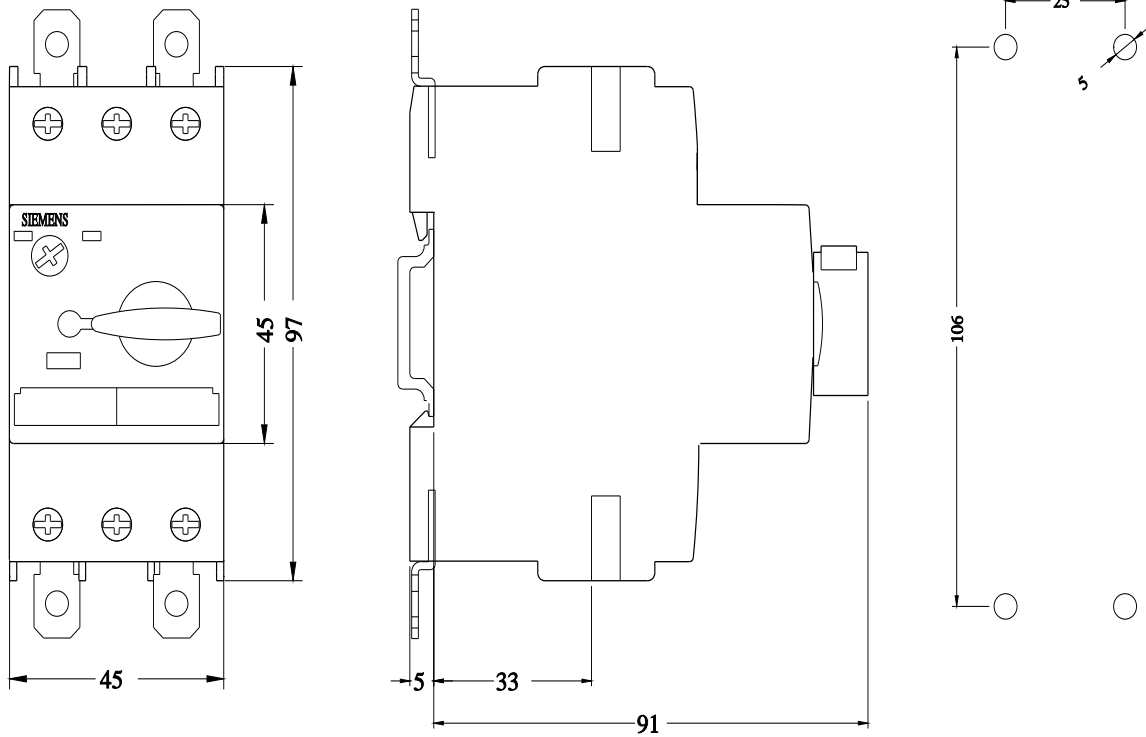

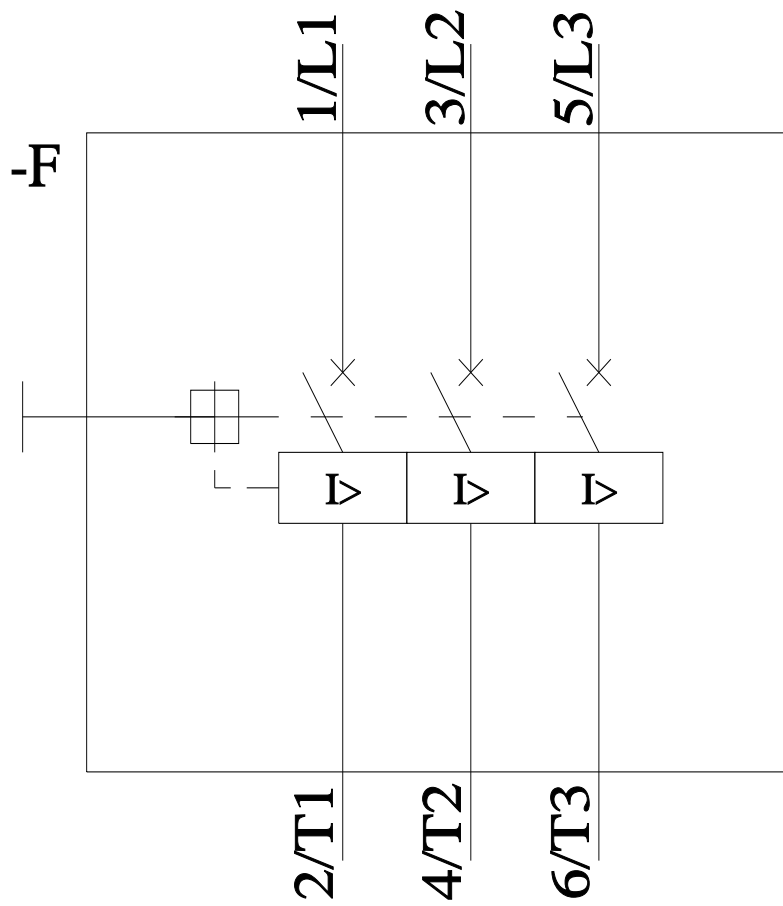

last modified:

2/11/2021 