


Galvanized Lanyards DIN 1480 hook-ring

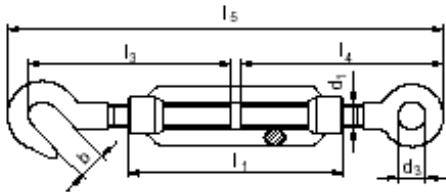

Size	l ₁ mm	l ₃ mm	l ₄ mm	l ₅ mm	d ₁ mm	d ₃ mm	b mm	Weight kg/100 pcs	Workload, tons		
									body	ring	hook
M06	110	85	80	173-255	M6	9	8,5	9,5	1,0	0,1	0,04
M08	110	85	84	183-260	M8	10	11,0	16,5	1,2	0,2	0,08
M10	125	112	105	217-315	M10	14	13,5	29,0	1,5	0,5	0,15
M12	125	117	115	248-325	M12	16	15,5	43,0	2,0	2,0	0,35
M14	140	122	122	272-365	M14	18	18,5	62,0	2,0	2,0	0,35
M16	170	138	165	320-435	M16	22	19,0	92,0	3,0	3,0	0,7
M20	200	170	167	360-490	M20	24	20,5	163,0	4,0	4,0	1,0
M22	215	185	167	405-555	M22	27	26,0	220,0	5,0	5,0	1,5
M24	250	205	205	440-615	M24	27	26,0	300,0	6,0	6,0	2,0
M30	250	225	255	495-660	M30	31	33,0	460,0	8,0	10,0	3,0
M36	290	255	276	600-790	M36	43	44	768,0			