




RoHS

Ver	Change Note	ECN. NO	Name	Date

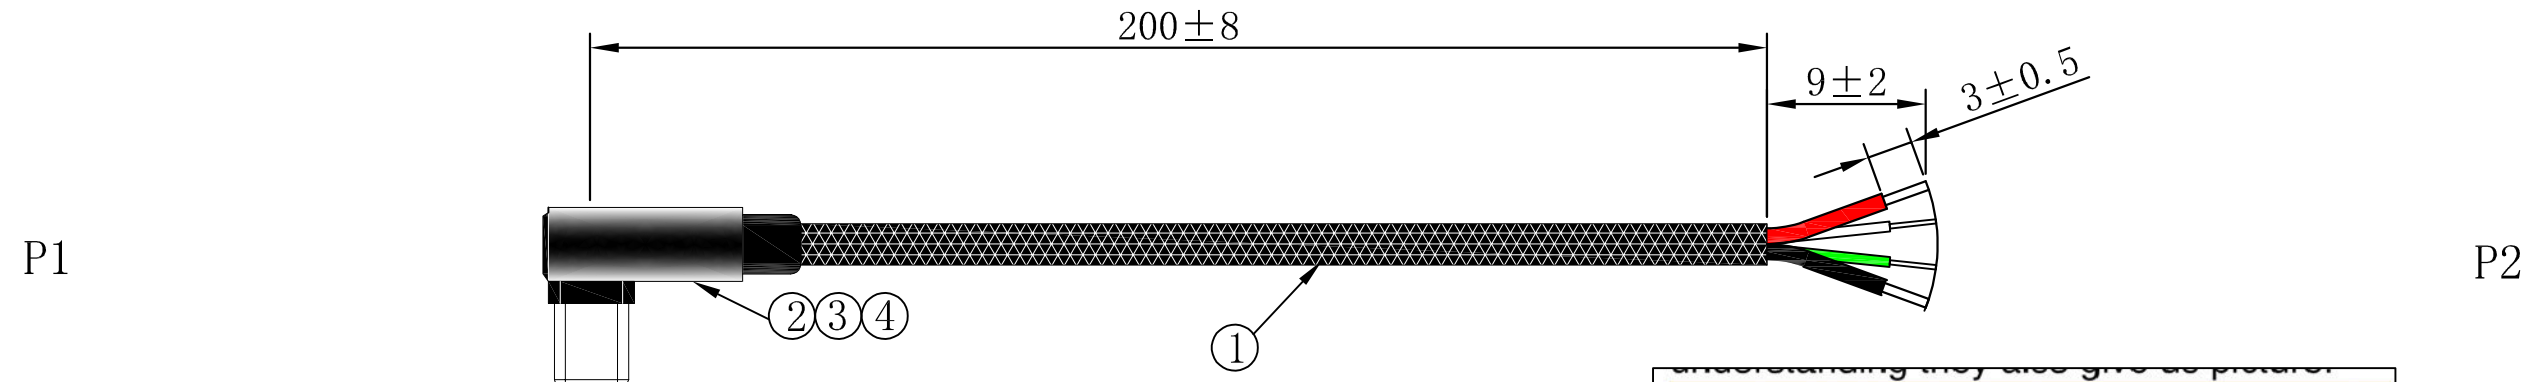

PIN ASS`Y

TYPE-C		
A4	VBUS	RED
B4		
A9		
B9		
A7	D-	WHITE
A6	D+	GREEN
A1	GND	BLACK
A12		
B1		
B12		
SHELL		

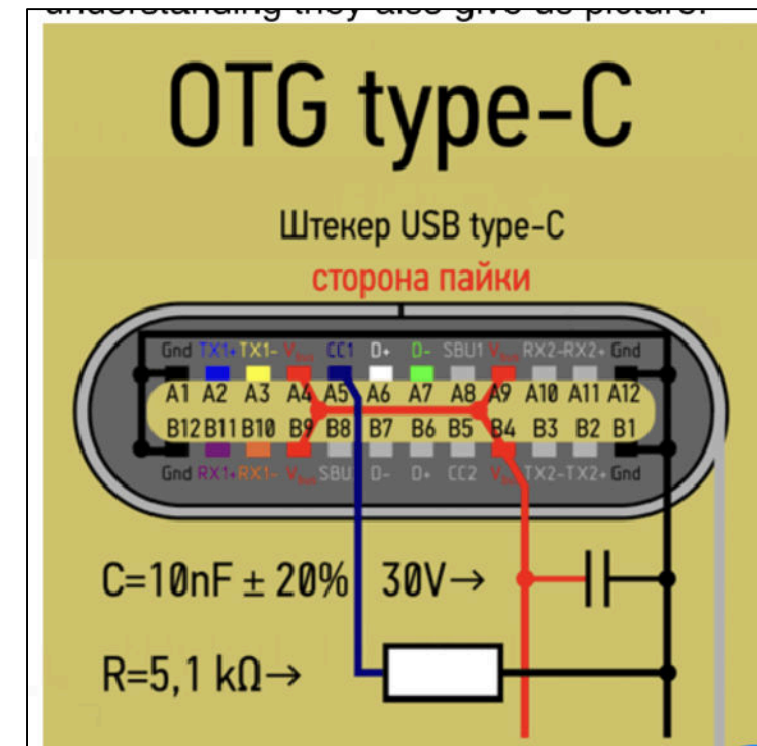

Notice:

1. 100% OPEN & SHORT MIS-WIRE TEST;
2. Contact Resistance:  $\leq 3\Omega$ , Hipot test: DC 300V
3. Insulation Resistance:  $\geq 10 M\Omega$ .
4. Bending Test: >500 times,  $\pm 90^\circ$  with 200g load and 20time/min.

						TOLERANCE		SPEC		TYPE-C TO OPEN L=200mm black			
4	OVER MOLD	Aluminium alloy shell		PCS	1	X	$\pm 0.5$	Part No.					
3	INSIDE MOLD	SOFT-PVC 45P COLOR:BLACK(A. N. M)		G	5	X. X	$\pm 0.25$	Draw No.	Approve				
2	USB PLUG	TYPE C MALE (BUILT-IN 5.1K $\Omega$ $\pm 5\%$ RESISTOR, Capacitor:10nF)		PCS	1	X. XX	$\pm 0.15$	Customer	Check				
1	CABLE	NON UL24AWG (35x0.10BC ID:1.15 $\pm 0.1$ )*2C RED BALCK + 28AWG(10/0.10 ID:0.85 $\pm 0.1$ )WHITE GREEN PVC BLACK JACKED YARN BRAIDED BLACK OD:3.5 $\pm 0.15$		mm	212	X° .	$\pm 1^\circ$	Part No.	SMC18047. 140.000				
NO.	Name	Specification		unit	q`ty			REV. A	1 OF 1	Unit	mm	Draw	Qiangfei
									Ratio	NTS	Date	2020-04-01	