

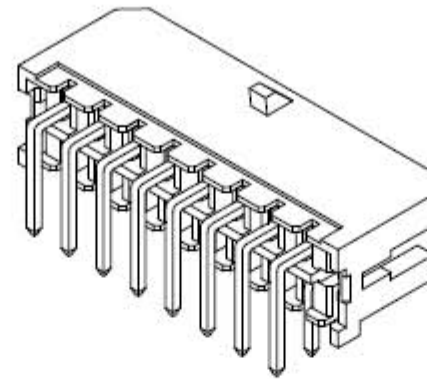
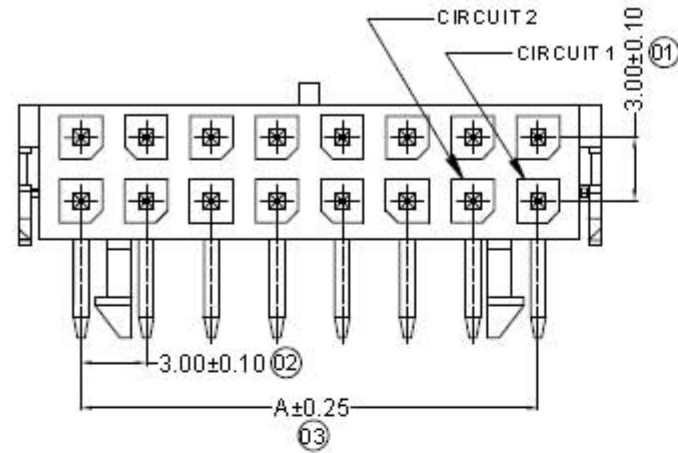



DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL

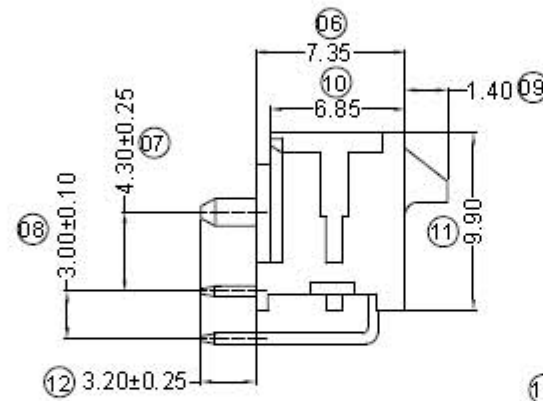


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Mark "*" Indicate Dimensions Need To Controlled In Emphasis

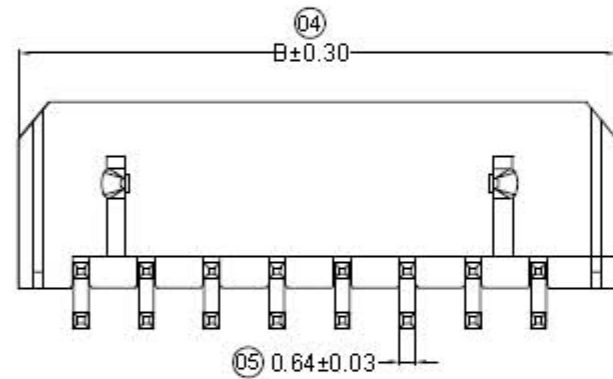


2*03P


Poles	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65



2P P.C.B LAYOUT



4P-6P P.C.B LAYOUT



8P-24P P.C.B LAYOUT

3001WR-2*XXS-LP	LCP UL 94V-0	Brass	Tin-Plated	3001H	1,000Pcs
3001WR-2*XXS-46	PA46 UL 94V-0	Brass	Tin-Plated	3001H	1,000Pcs
3001WR-2*XXS-P0	Nylon 66 UL 94V-0	Brass	Tin-Plated	3001H	1,000Pcs
Part No.	Material	Material(Pin)	Finish(Pin)	Mates With YTE Housing	Q'ty/Bag

GENERAL TOLERANCE

.X	±0.30
.JX	±0.20
.XXX	±0.10

PROJECT	UNIT	SCALE	NUMBER	REV	DATA
☉	MM	1:1	A-1001	A	2017/10/25

PART NO. 3001WR-2*XXS-XX

TITLE 3.00 mm Crimp Style Commctctors

APPROVAL	CHECK	DRAWN
Bob Sun	Xiaoxin LI	Liu gang