




[home](#) [Catalog](#) [LED spotlights](#) [Low voltage LED spotlights](#)

AEK-DSP39-060-001 NV

LOW VOLT LED SPOTLIGHT

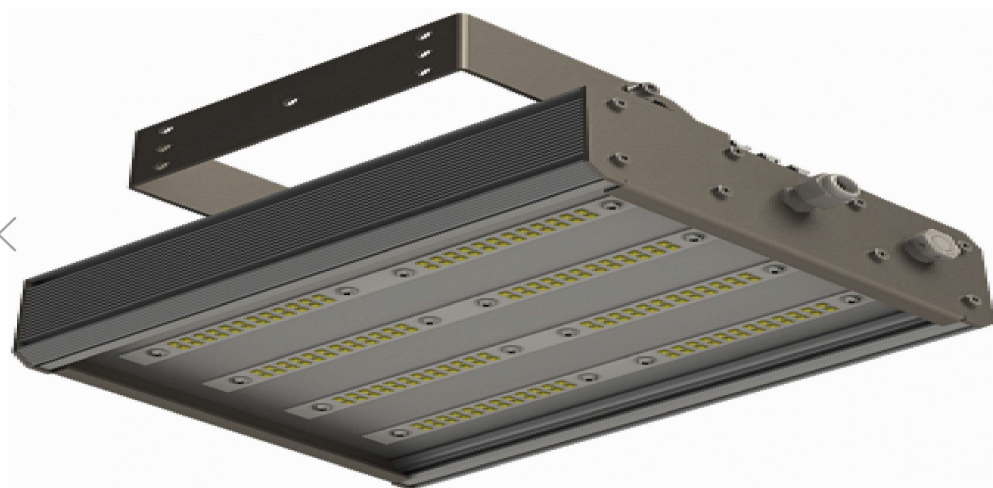

✓ Are available

contact number

ASK FOR A PRICE

It is possible to order a sample for
free. Specify



WRITE TO CHAT



We will work
on your project



Price
from the manufacturer

We use
quality components



Warranty up to 7 years



Sample free

Model Description

Power, W	60
Luminous flux of the lamp, Lm	5580
Luminous flux of LEDs, Lm	7440
Color temperature, K	3000 / 4000 / 5000
KSS	D120
Weight, kg	2.10
Size, mm	250x194x70
Degree of protection of the shell	IP65
Input voltage, V	12 / 24 / 36 / 48 AC/DC
Color rendering index, Ra	>80
Power factor	≥0.95
Electric shock class	III
KP luminous flux	≤1%
Type of climatic version	UHL1
Temperature regime	from -60° to +45°C
Guarantee	5 years
LED service life	100,000 hours
Diffuser	Clear / Opal
Current type	Constant / Variable
Mounting method	brace

Modifications



IES files




Blueprints



The
passport



Download
PDF



Mounting options

