

Electro-optical Characteristics:


Code for Parts	Lighting color	VF			λ_p typ (nm)	$\Delta\lambda$ typ (nm)	IV	
		IF (mA)					IF (mA)	typ (mcd)
KB-170R	Red	20	700	100	700	100	20	2.5
KB-170G	Green	20	567	26	567	26	20	6.5
KB-170D	Amber	20	605	40	605	40	20	6.0
KB-170Y	Yellow	20	589	40	589	40	20	6.5
KB-170YG	Yellow Green	20	570	30	570	30	20	9.5
KB-170UG	Super Green	20	567	24	567	24	20	9.5
KB-170SD	Super Bright Orange	20	630	40	630	40	20	10
KB-170UR	Ultra Bright Red	20	660	20	660	20	20	17
KB-170HR	High Bright Red	20	660	20	660	20	20	25
KB-170PG	Pure Green	20	557	24	557	24	20	3.5

Absolute Maximum Ratings:

Series	(Ta 25°)	
	KB-170	KB-170UR/HR
Pd (mW)	50	78
IF (mA)	20	30
IFP (mA)	100 * 1	
VR (V)	5	
Top (°C)	-30 ~ +85	
TSt (°C)	-40 ~ +85	


* 1 Condition for IFP is pulse of 1/10 duty and 0.1 msec width

Package Outline Drawing:

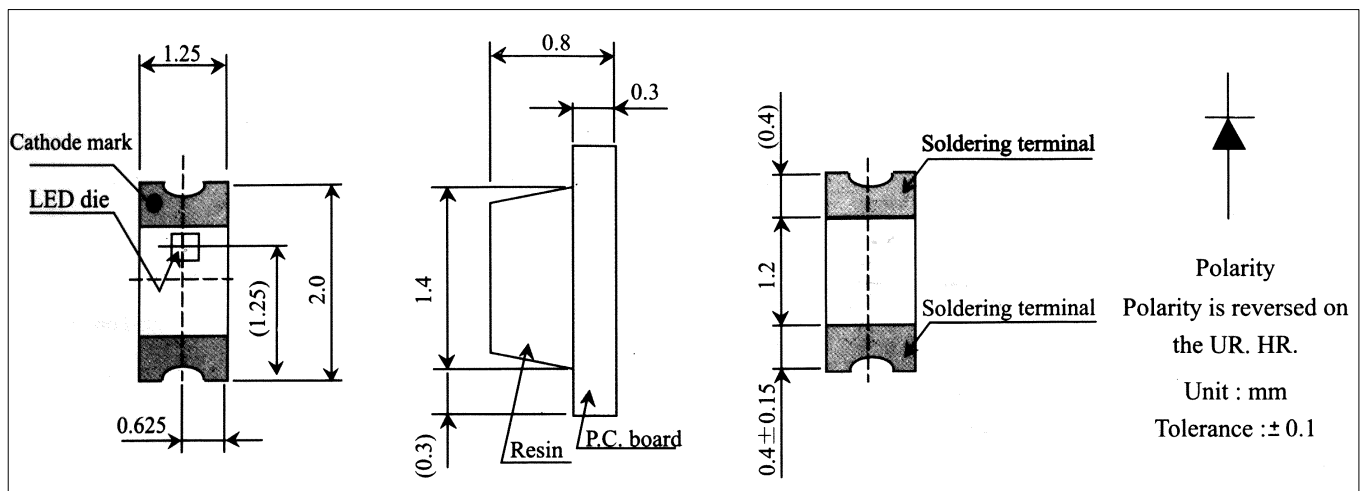

Dimensions: 2.0 (L) x 1.25 (W) x 0.8 (H) mm

Recommended Soldering Pattern For Reflow Soldering:

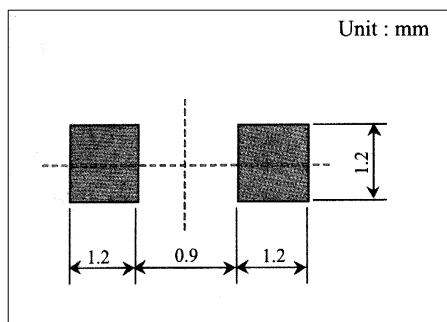

Tape Specifications: Loaded Quantity per Reel: 4000 pcs/ reel

