

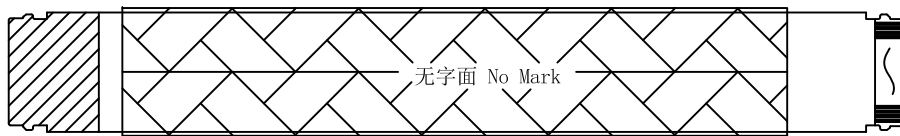
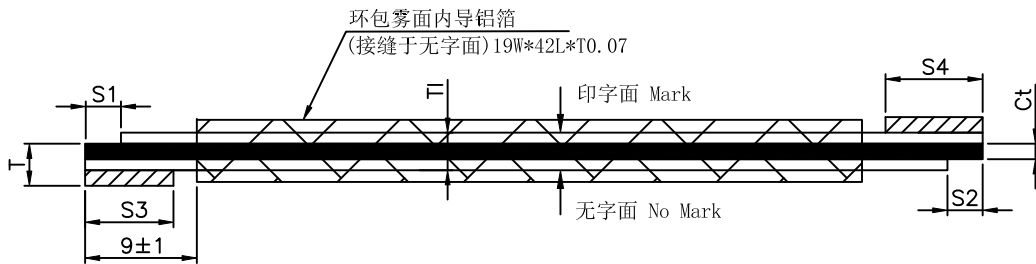




RoHS

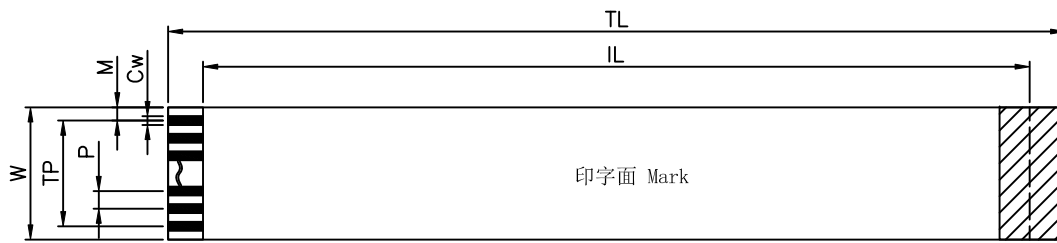

S1/S2端冲边前: 5/5/9/9
S1/S2端冲边后: 4/4/8/8

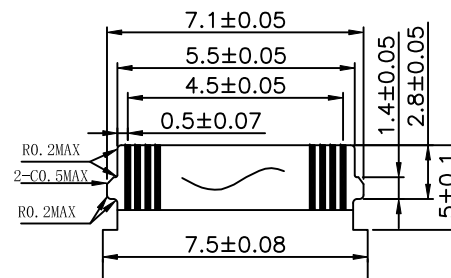

S1/S2端冲边图

- Storage condition.
Temperature: 20±8° C, Humidity: LESS THAN 65RH%.
- Quality assurance period.
The ffc with gold plated is stored for 12 months and with tin plated is stored for 5 month in normal condition
- Products comply with ROHS standard.
- Impedance: no control.
- 印字为: BJD E350749 AWM 20706 105C 60V VW-1.

STRUCTURE			
NO	ITEM NAME	Specification	REMARK
1	绝缘膜(字膜)	BJD UL20706 105° 60V (60um)	PET
2	绝缘膜(白膜)	UL20706 105° 60V (60um)	PET
3	蓝色补强板	18mm*205um	PET
4	裸铜线	宽度Cw	0.3 ±0.03
		厚度Ct	0.035 ±0.005
		镀层	镍(Ni) ≥40u" 金(Au) ≥3u"
5	雾面铝箔	19W*42L*T0.07	1PCS
6			

DIMENSION			
导体芯数(Number of conductors)	N	10(14-4)	
总长(Total length)	TL	60.0	±1.0
绝缘长(Insulation length)	IL	42.0	±1.0
间距(Pitch)	P	0.5	±0.05
边距(Margin)	M	1.5	±0.08
总间距(Total pitch)	TP	4.5	±0.05
总宽度(Total width)	W	7.5	±0.08
插入厚度(Insert thickness)	T	0.3	±0.03
线身厚度(Wire thickness)	TI	0.15	±0.03
金手指长度 (Gold finger length)	S1	4.0	±0.5
	S2	4.0	±0.5
补强板长度 (Reinforcement plate length)	S3	8.0	±1.0
	S4	8.0	±1.0
切断斜度(Cutting slope)	A	≤0.3	
冲孔斜度(Punch slope)	B	≤0.5	

				Drawing number S13332A0		FFC 工程图 FFC Drawings	
				client name JK0759		APPROVED 陈天舒	
				client number XX-XXXXX		DATE 2024-04-09	
				初版发行 陈华 2024.04.09		COMPUTER NO 6xxxxx-xxxxxx	
				UNIT MM		CHECKED 杨晓玲	
				SER REVISIONS		DATE 2024-04-09	
				CHK		NAME B-0.5-10P-60MM-4/4-8/8	
				DATE		DRAWN 陈华	
				MM		DATE 2024-04-09	
				MM		SIZE A4	
				MM		SCALE	
				MM		REV 0/X	