


NO. 序号	Drawing 制作	Date 制作日期	Ver. 版本	Change Records 变更记录
1	Liao	2024-03-22	A	新版本

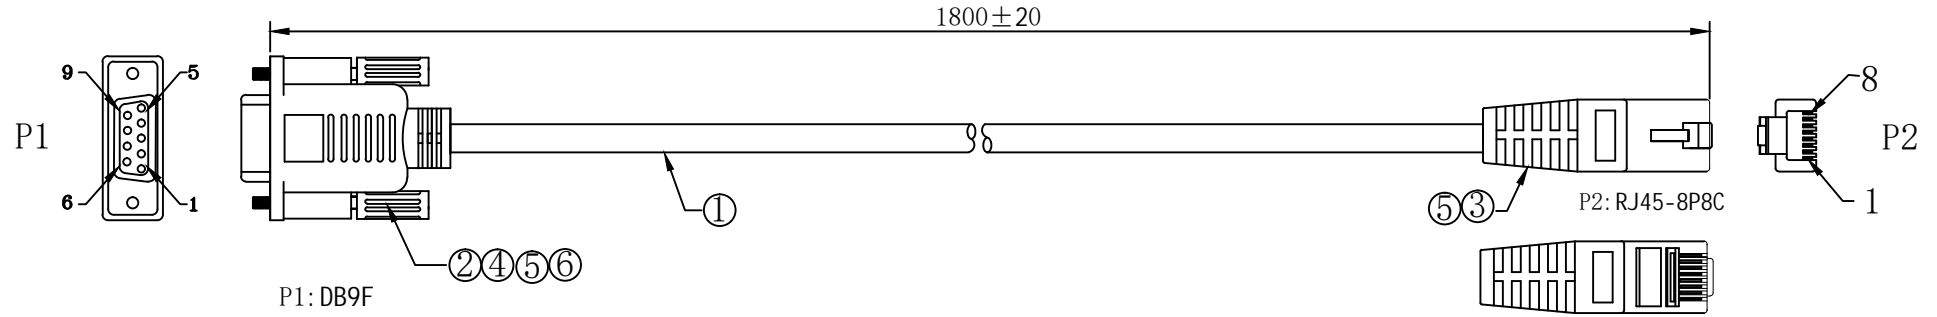

Electrical performance testing conditions:

- <1> Open circuit, short circuit: 100% test
- <2> Insulation impedance: minimum 3 M DC 300V
- <3> Conduction impedance: maximum 5
- <4> All materials comply with RoHS requirements

P1		P2
DB9		RJ45
2	RED	5
3	WHITE	4
5	BLACK	6

No. 序号	Name 材料名称	Specification 规格描述	Dosage 用量	Unit 单位
1	Cable 线材	7/0.10*3C PVC Wire black OD=4.5mm	1.8	M
2	Connector 插头	DB9P Female, Nickel Plated DB9P 母头 蓝色胶芯, 插头镀镍	1	PCS
3	Connector 插头	RJ45/8P8C PIN针镀金 (G/F)	1	PCS
4	Screw 螺丝	2.3*36MM 镀镍 Nickel Plated	2	PCS
5	Outer Mold 外模	45P PVC Material BLACK	10	GS
6	Inside Mold 内模	透明PE料 Transparent PE material	3	GS
7	Packing 包装			

Customer 客户		Item No. 客户料号		Page 页码	1/1		
Drawing 绘制	Liao	Item Name 品名规格	DB9F-RJ45/8P8C	Rate 比例	1:1		
Check 审核		Drawing NO. 图纸编号		Ver. 版本	A0	Unit 单位	mm
Approved 核准		Date 制作日期	2024-03-22	PartNO. 客户			